



## BS23BSET



### °BS23BSET

BS23 is a floor tensioner that also works well as a light weight turnbuckle. Use it to tension cables to minimize the movement of displays.

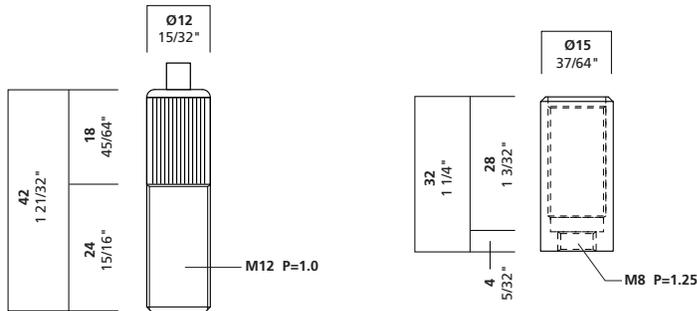

### ° Product Information

#### cable size

3/64" 1.2 mm

1/16" 1.5 mm

#### maximum weight

3/64": 40 lbs. 18 kg

1/16": 65 lbs. 30 kg

#### function

tensioner: floor

**BS23BSET:** surface mount: concrete, wood, tile

#### installation instructions

**BS23BSET:** Mount base socket to wood surface with #12 pan head screw.

Mount base socket to concrete surface with 1/4-20 concrete anchor and bolt.

Thread the tensioner into the socket two turns. Insert cable into tensioner.

Turn tensioner down by hand while holding socket with other (to prevent countertwist).

1-2

° Companion Products, please see their individual information sheets.



### °BS23CSET

#### Arakawa Hanging Systems

2505 SE 11th Avenue, Suite 122

Portland, Oregon 97202

phone: 503.236.0440

fax: 503.236.0427

toll free: 888.272.5292

[www.arakawagrip.com](http://www.arakawagrip.com)



Copyright © 2007 Arakawa & Co., Ltd. All rights reserved. Arakawa products are covered by U.S. and foreign patents, issued and pending. Specification and price change privileges reserved.